

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

# SALEM

MEDIUM SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

*Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED a filamento** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



K26.111.M1R

E27 FILAMENT LED

**INDOOR & OUTDOOR USE**

+80°C  
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV 500






**SALEM - LANTERN COMPONENTS**

**IP55**



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

**PINNACOLO** decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance,.

**TETTO** realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

**DIFFUSER** made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

**DIFFUSORE** in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

**CAGE** made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

**GABBIA** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

**SALEM**

K26.000 \*



**Dimensions and weight**

Height: 410 mm  
Width: 260 mm  
Depth: 227 mm  
Weight: 1,3 Kg

**Moulded colours:**

Black  White

**Painted colours:**

Antique green  Antique bronze

**Diffuser PMMA:**

Clear  Opal

**E27 VERSIONS**

100 - 240 V

\*ADD. SUFFIX



E27 (CFL-LED)		max 160 mm		.E27
	6 W	800 Lm	4000 K	.F1L
			2700 K	.F1R
	8 W	1000 Lm	4000 K	.M1L
			2700 K	.M1R
	12 W	1500 Lm	4000 K	.N1L
			2700 K	.N1R

- PERFECT MATCHING WITH CLASSIC LANTERNS:** clear LED filament lamp with the look and the feeling of a traditional incandescent bulb.
- SUITABLE FOR OUTDOOR USE:** 100-240 V built-in driver fully protected against heat and humidity by silicone paste.
- OMNIDIRECTIONAL LIGHT:** 360° light output for a better lighting distribution on hexagonal and square classic lanterns.
- HIGH EFFICIENCY:** 90% energy saving.

6W  
8W  
12W = 60W  
75W  
100W incandescent


**SAVE 90%**

**LED LAMPS**



Technical details on page 552.

**PHOTOMETRIC DATA SAMPLE**

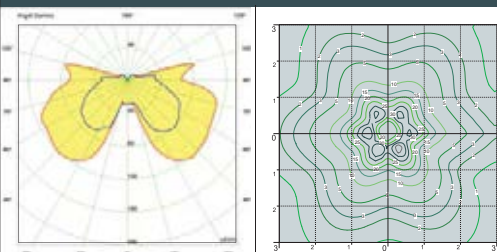

**SALEM** lantern clear with Fumagalli Filament Led Lamp 8W.

POST height 2mt  
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

\* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE



**SALEM**  
MEDIUM SIZE



**K26.131.M1R**



**K26.120**



**K26.151.M1R**

MADE IN ITALY



BISSO/SALEM	
<b>E27</b> lampholder	K26.131.E27
<b>6W</b> LED	K26.131.F1R
<b>8W</b> LED	K26.131.M1R
<b>12W</b> LED	K26.131.N1R
Pcs 12 Kg 19 mc 0,225	2700K*

SICHEM/SALEM	
<b>E27</b> lampholder	K26.120.E27
<b>6W</b> LED	K26.120.F1R
<b>8W</b> LED	K26.120.M1R
<b>12W</b> LED	K26.120.N1R
Pcs 12 Kg 19 mc 0,225	2700K*

SALEM	
K26.000	
Pcs 1 Kg 1,3 mc 0,018	

\*TO ORDER THE 4000K VERSION, USE THE SUFFIXES .F1L(6W) .M1L (8W) .N1L (12W)

MINILOT/SALEM	
<b>E27</b> lampholder	K26.111.E27
<b>6W</b> LED	K26.111.F1R
<b>8W</b> LED	K26.111.M1R
<b>12W</b> LED	K26.111.N1R
Pcs 12 Kg 19 mc 0,225	2700K*

PORPORA/SALEM	
<b>E27</b> lampholder	K26.141.E27
<b>6W</b> LED	K26.141.F1R
<b>8W</b> LED	K26.141.M1R
<b>12W</b> LED	K26.141.N1R
Pcs 1 Kg 4 mc 0,034	2700K*

IAFET/SALEM resin	
<b>E27</b> lampholder	K26.162.E27
<b>6W</b> LED	K26.162.F1R
<b>8W</b> LED	K26.162.M1R
<b>12W</b> LED	K26.162.N1R
Pcs 2 Kg 79 mc 0,086	2700K*

MIZAR/SALEM resin	
<b>E27</b> lampholder	K26.151.E27
<b>6W</b> LED	K26.151.F1R
<b>8W</b> LED	K26.151.M1R
<b>12W</b> LED	K26.151.N1R
Pcs 1 Kg 3 mc 0,07	2700K*

ALOE'R./SALEM resin	
<b>E27</b> lampholder	K26.163.E27
<b>6W</b> LED	K26.163.F1R
<b>8W</b> LED	K26.163.M1R
<b>12W</b> LED	K26.163.N1R
Pcs 2 Kg 8,6 mc 0,121	2700K*

ARTU'/SALEM	
<b>E27</b> lampholder	K26.158.E27
<b>6W</b> LED	K26.158.F1R
<b>8W</b> LED	K26.158.M1R
<b>12W</b> LED	K26.158.N1R
Pcs 1 Kg 9,6 mc 0,148	2700K*

COMPANY  
UP&DOWN  
DOWNLIGHT  
IN-GROUND  
BRICKLIGHT  
FLOODLIGHT  
BOLLARD  
BULKHEAD  
GARDEN  
URBAN CLASSIC  
URBAN MODERN  
POST  
LAMPS  
REFERENCES

**SALEM**  
MEDIUM SIZE



K26.157.S30.M1R



K26.157.S20.M1R



K26.156.M1R







RICU BISSO/SALEM 2+1	
<b>E27</b> lampholder	K26.157.S21.E27
<b>6W</b> LED	K26.157.S21.F1R
<b>8W</b> LED	K26.157.S21.M1R
<b>12W</b> LED	K26.157.S21.N1R
Pcs 1 Kg 13 mc 0,214	2700K*

RICU BISSO/SALEM 3+1	
<b>E27</b> lampholder	K26.157.S31.E27
<b>6W</b> LED	K26.157.S31.F1R
<b>8W</b> LED	K26.157.S31.M1R
<b>12W</b> LED	K26.157.S31.N1R
Pcs 1 Kg 14,3 mc 0,214	2700K*

GIGI/SALEM	
<b>E27</b> lampholder	K26.156.E27
<b>6W</b> LED	K26.156.F1R
<b>8W</b> LED	K26.156.M1R
<b>12W</b> LED	K26.156.N1R
Pcs 1 Kg 10,9 mc 0,172	2700K*

RICU/SALEM	
<b>E27</b> lampholder	K26.157.E27
<b>6W</b> LED	K26.157.F1R
<b>8W</b> LED	K26.157.M1R
<b>12W</b> LED	K26.157.N1R
Pcs 1 Kg 11,7 mc 0,18	2700K*

RICU BISSO/SALEM 2L	
<b>E27</b> lampholder	K26.157.S20.E27
<b>6W</b> LED	K26.157.S20.F1R
<b>8W</b> LED	K26.157.S20.M1R
<b>12W</b> LED	K26.157.S20.N1R
Pcs 1 Kg 14,2 mc 0,214	2700K*

RICU BISSO/SALEM 3L	
<b>E27</b> lampholder	K26.157.S30.E27
<b>6W</b> LED	K26.157.S30.F1R
<b>8W</b> LED	K26.157.S30.M1R
<b>12W</b> LED	K26.157.S30.N1R
Pcs 1 Kg 15,2 mc 0,214	2700K*